

LISDI Lightning Isolator for SDI



Specification

Video Input	BNC
Protection	SDI
Cable	Coaxial Cable
Video Output	BNC
Dimensions (W x H x D)	26 x 31 x 24mm including 150mm Coaxial cable
Weight (g)	32g

Key Features

- Protect SDI Video
- Substantial savings on the cost of the cable itself

LIPOE Lightning Isolator for PoE





Specification

Input	RJ45
Protection	PoE
Output	RJ 45
Dimensions (W x H x D)	64 x 74 x 40mm
Weight (g)	85g

Key Features

- Protect PoE
- Substantial savings on the cost of the cable itself

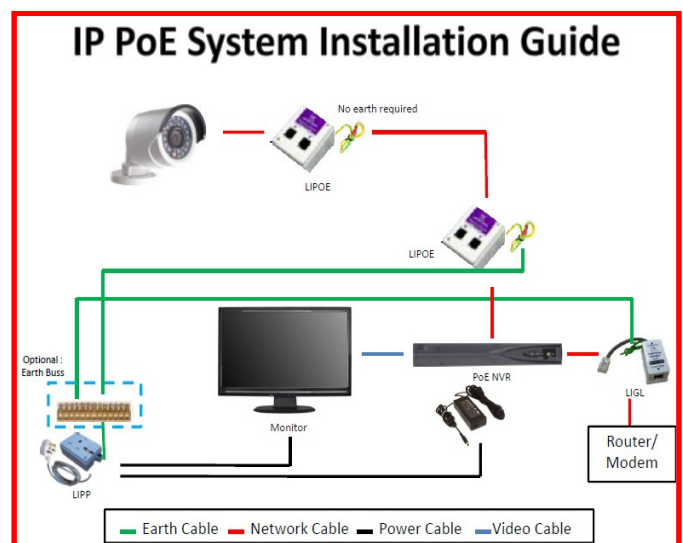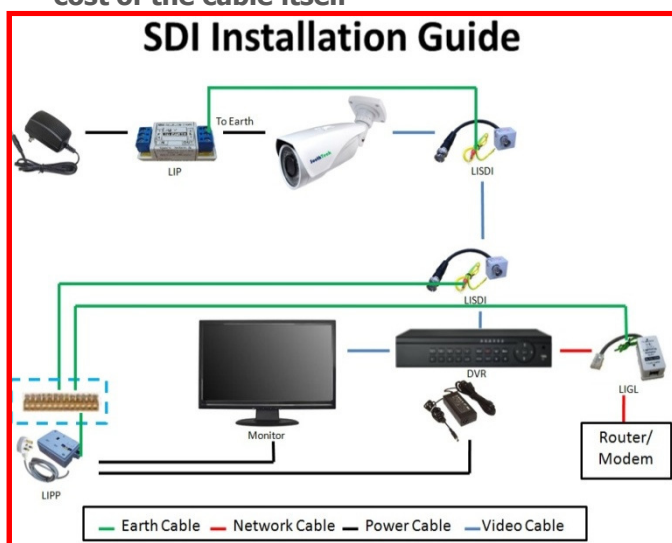

- Please note that the earth is a Floating Earth - Patented Technology used together with this range of Lightning Isolator only, which should never be mixed with conventional grounding earth or any other earth as mixing it would result in undesirable effects - worst case nullifying the protection.
- The earth cables have to be properly connected to ensure maximum protection. Earth cables should be as short as possible.
- All green lines must go directly (not looped) through this ground reference at the power lightning isolator or earth buss where applicable.