

# Model : ASD320IR-36X

## HD 1080p 4in1 Outdoor Speed Dome 36X



### Key Features

- ▶ HD 1080p, 2.0MP
- ▶ 1/2.8" Sony Exmor CMOS Sensor
- ▶ 4in1 Signal Switchable : AHD/TVI/CVI/CVBS
- ▶ High Speed, 36X Optical Zoom
- ▶ Metal Casing

### Technical Specification

Image Sensor	1/2.9" Sony Exmor CMOS Sensor
Effective Pixel	1920(H)*1080(V)
Resolution	HD 1080p, 2.0MegaPixles
S/N Ratio	≥50dB
Video Output	Comply with AHD/TVI/CVI/CVBS
WB	Indoor/Outdoor/Auto/Manual
AGC	Auto/Manual
D-WDR	Support
BLC	Support
Operation Menu	Multiple languages for OSD menu, English, Italian, Spanish, etc
Lens	36X Optical Zoom 4.6mm~165mm
IR LED	8pcs Array 42Mil IR LEDs
Power Voltage	DC12V 4A
Power Consumption	≤25W
Working Temperature	-40°C ~+60°C
Lightning Protection	Transient voltage 6000V
Case Material	Metal, IP66 rate protection


### Operation

Rotation Range	Pan: 0°~360°, Tilt: 0°~93°
Rotation Speed	Pan: 0°~400°/s, Tilt: 0°~200°/s
Auto Flip	Horizontal 180° Vertical 93°
Preset Points	220pcs preset (Preset Dwell time 01~60s interval available)
A-B Scan	User programmable (Scan speed 1~64 levels setting available)
Guard Tours	8 Groups (Max. 16points, dwell time user selectable)
PWR on Action	Memory/Pattern 1/Tour 1/ 360° scan/A-B scan/Park 1/None
Park Mode	Pattern 1/Tour 1/360° scan/ A-B scan/Park 1/None
Park Time	1~60mins available
Pattern Scan	4pcs (Max. 15min, max. 512 commands)
Time Scheduling Function	6 Tasks
Communication Mode	RS485 (+/-) / Coaxial cable

Note : All specifications may change without prior notice

# Model : ASD320IR-36X

HD 1080p 4in1 Outdoor Speed Dome 36X

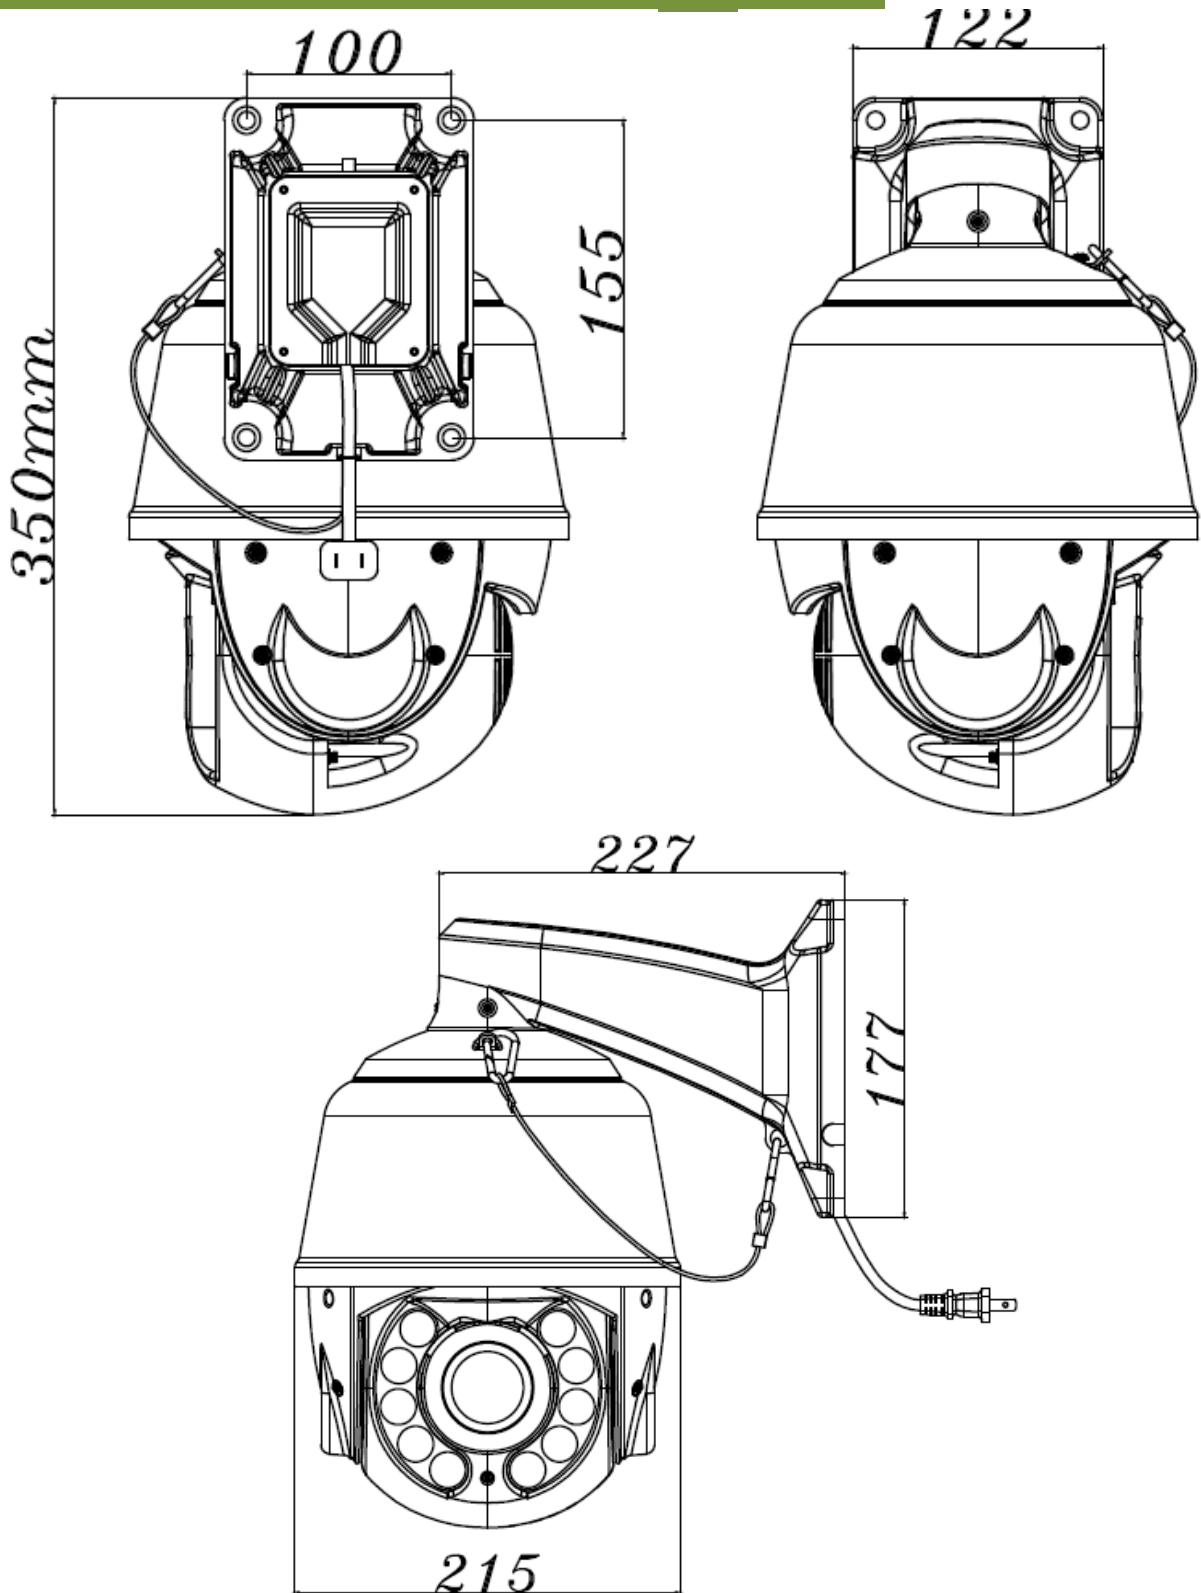

Note : All specifications may change without prior notice